



AFRL-RX-TY-TR-2009-4583

RESULTS: MINE AREA CLEARANCE VEHICLE (MACV) EXPLOSIVES EXPERIMENTS FINAL TEST REPORT

Kenneth J. Knox, PhD

**Applied Research Associates
P.O. Box 40128
Tyndall AFB, FL 32403**

SEPTEMBER 2005

Final Report for 6 September 2005 to 30 September 2005

<p>Distribution Statement A: Approved for public release; distribution unlimited.</p>
--

**AIRBASE TECHNOLOGIES DIVISION
MATERIALS AND MANUFACTURING DIRECTORATE
AIR FORCE RESEARCH LABORATORY
AIR FORCE MATERIAL COMMAND
139 BARNES DRIVE, SUITE 2
TYNDALL AIR FORCE BASE, FL 32403-5323**

NOTICE AND SIGNATURE PAGE

Using Government drawings, specifications, or other data included in this document for any purpose other than Government procurement does not in any way obligate the U.S. Government. The fact that the Government formulated or supplied the drawings, specifications, or other data does not license the holder or any other person or corporation; or convey any rights or permission to manufacture, use, or sell any patented invention that may relate to them.

This report was cleared for public release by the Air Force Research Laboratory, Materials and Manufacturing Directorate, Airbase Technologies Division, Public Affairs and is available to the general public, including foreign nationals. Copies may be obtained from the Defense Technical Information Center (DTIC) (<http://www.dtic.mil>).

REPORT NUMBER AFRL-RX-TY-TR-2009-4583 HAS BEEN REVIEWED AND IS APPROVED FOR PUBLICATION IN ACCORDANCE WITH ASSIGNED DISTRIBUTION STATEMENT.

//signature//
WALTER M. WALTZ
Work Unit Manager

//signature//
JOHN S. MASCELLI, Captain, USAF
Acting Chief, Force Protection Branch

//signature//
ALBERT N. RHODES, PhD
Acting Chief, Airbase Technologies Division

This report is published in the interest of scientific and technical information exchange, and its publication does not constitute the Government's approval or disapproval of its ideas or findings.

REPORT DOCUMENTATION PAGE				<i>Form Approved</i> <i>OMB No. 0704-0188</i>	
<small>The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.</small> PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) 06-SEP-2005		2. REPORT TYPE Final Technical Report		3. DATES COVERED (From - To) 06-SEP-2005 -- 30-SEP-2005	
4. TITLE AND SUBTITLE Results: Mine Area Clearance Vehicle (MACV) Explosive Experiments Final Test Report				5a. CONTRACT NUMBER FA4819-07-D-0001	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER 99999F	
6. AUTHOR(S) Knox, Kenneth J., PhD				5d. PROJECT NUMBER GOVT	
				5e. TASK NUMBER F0	
				5f. WORK UNIT NUMBER Q240FC6G	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Applied Research Associates P.O. Box 40128 Tyndall Air Force Base, FL 32403				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Air Force Research Laboratory Materials and Manufacturing Directorate Airbase Technologies Division 139 Barnes Drive, Suite 2 Tyndall Air Force Base, FL 32403-5323				10. SPONSOR/MONITOR'S ACRONYM(S) AFRL/RXQF	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) AFRL-RX-TY-TR-2009-4583	
12. DISTRIBUTION/AVAILABILITY STATEMENT Distribution Statement A: Approved for public release; distribution unlimited.					
13. SUPPLEMENTARY NOTES Ref AFRL/RXQ Public Affairs Case # 09-190. Document contains color images.					
14. ABSTRACT The Hydrema 910 Mine Area Clearance Vehicle (MACV), a Danish mine clearing system, is being converted to teleremote operations by the Air Force Research Laboratory (AFRL) for the HQ Air Combat Command Civil Engineer (HQ ACC/CE). On 8 July 2005 AFRL conducted a series of experiments to evaluate and demonstrate the survivability of the robotic controls during simulated mine clearing operations. The MACV was exposed to a range of munitions detonated adjacent to the mine-clearing flail, ranging from antipersonnel weapons to antitank weapons. None of the weapons had an appreciable effect on the MACV or on the robotic controls contained in the operator's cab. The vehicle cab was exposed to approximately 5.5 psi incident pressures on the exterior, but the interior pressure increased less than 0.2 psi. The magnitude of shock experienced by the cab and the robotic controls was 8.7 g's or less, well within the proven capacity of the control systems of 19.5 g's. Overall, the MACV did a good job protecting the cab and the robotic controls in the experiment series.					
15. SUBJECT TERMS MACV, MACE, mine clearance, flail, teleremote, Hydrema, Perkins, sensors, robotic, ACC, vehicle cab, GPS, C-130					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES 25	19a. NAME OF RESPONSIBLE PERSON Walter M. Waltz
a. REPORT U	b. ABSTRACT U	c. THIS PAGE U			19b. TELEPHONE NUMBER (Include area code) (850) 283-3725

Reset

TABLE OF CONTENTS

1.0 Executive Summary	3
2.0 Background	3
3.0 References	5
4.0 Objectives and Technical Approach	5
4.1 Objective	5
4.2 Technical Approach	5
4.3 Data Collection	6
5.0 Experimental Results	6
5.1 Test 1: 10-lb C-4 Charge	7
5.2 Test 2: M67 Frag Grenade	9
5.3 Test 3: BLU-97 CEM	10
5.4 Test 4: M15 Mine	11
6.0 Discussion	13
7.0 Conclusions	14
Appendix: Data Graphs	15

FIGURES

1. Hydrema 910 Mine Area Clearance Vehicle	5
2. Explosive Placement	6
3. Instrumentation Inside Operator's Cab	7
4. Pre-test: 10-lb C-4 Charge	8
5. Post-test: 10-lb C-4 Charge	8
6. Pre-test: M67 Grenade	9
7. Post-test: M67 Grenade	9
8. Pre-test: BLU-97 CEM	10
9. Post-test: BLU-97 CEM	11
10. Pre-test: M15 Mine	12
11. Post-test: M15 Mine	12
12. MACV Pressure Measurements	13
13. MACV Cab Accelerations	14

TABLES

1. Test 1 Results	8
2. Test 2 Results	10
3. Test 3 Results	11
4. Test 4 Results	13

RESULTS:

MINE AREA CLEARANCE VEHICLE (MACV) EXPLOSIVE EXPERIMENTS

1.0 Executive Summary

The Hydrema 910 Mine Area Clearance Vehicle (MACV), a Danish mine clearing system, is being converted to teleremote operations by the Air Force Research Laboratory (AFRL) for the HQ Air Combat Command Civil Engineer (HQ ACC/CE). On 8 July 2005 AFRL conducted a series of experiments to evaluate and demonstrate the survivability of the robotic controls during simulated mine clearing operations. The MACV was exposed to a range of munitions detonated adjacent to the mine-clearing flail, ranging from antipersonnel weapons to antitank weapons. None of the weapons had an appreciable effect on the MACV or on the robotic controls contained in the operator's cab. The vehicle cab was exposed to approximately 5.5 psi incident pressures on the exterior, but the interior pressure increased less than 0.2 psi. The magnitude of shock experienced by the cab and the robotic controls was 8.7 g's or less, well within the proven capacity of the control systems of 19.5 g's. Overall, the MACV did a good job protecting the cab and the robotic controls in the experiment series.

2.0 Background

- 2.1 The Hydrema 910 (Mine Clearance Vehicle) MCV-2 Flail System, hereafter referred to as the Mine Area Clearance Vehicle (MACV), is a commercially available mine clearing system designed by the Danish government to be manually operated. The HQ Air Combat Command Civil Engineer (HQ ACC/CE) has expressed strong interest in being able to remotely employ the vehicle system, thereby removing the man-in-the-seat during mass area clearance operations in an effort to improve personnel safety. The Air Force Research Laboratory's (AFRL's) MACV Developmental Test & Evaluation program supports the continuing developmental testing effort to establish the effectiveness (high degree of driving accuracy and positioning) of teleremote operations as a means of employing the mine clearing system.
- 2.2 Description. The MACV employs an articulated chassis so that all four wheels are in contact with the ground at all times. When being driven on roads the cab is to the front; during mine clearing operations, the vehicle is driven in reverse with the cab to the rear. The fully enclosed, all-welded steel armor cab protects the occupants from small arms fire up to 7.62 mm armor piercing rounds and the bullet-proof windows provide all around visibility. For increased crew comfort during travel and mine clearing operations, the cab is suspended in rubber elements to dampen vibration. The cab seats three people, although the vehicle can be operated by a single operator.

Results: Mine Area Clearance Vehicle (MACV) Explosive Experiments

The vehicle is powered by two Perkins 1006-6TW 6-cylinder turbocharged diesel engines. One is used for driving the vehicle and is coupled to a six-speed semi-automatic transmission. The second diesel engine powers the mine clearing flails. Each engine has its own cooling, air filter, exhaust and hydraulic system. During mine clearing operations, a separate hydrostatic transmission is used which gives a continuously variable speed and considerable tractive force. The hydrostatic driving unit can be supplied from the hydraulic system of the powerpack and can be used in an emergency should the main engine stop, enabling the Hydrem 910 to move out of immediate danger under its own power.

The MACV can be manually driven on roads up to a maximum speed of 35 km/h. The vehicle is steered through a hydrostatic pivot steering system on all four wheels with an emergency backup in case of engine failure. The fuel tanks hold 300 liters and are integrated onto the chassis for maximum protection. When in the travel mode, the complete flail system and deflector, which is suspended on hydraulic systems, is raised clear of the ground and traversed through 90° using a hydraulically operated tilting/turning system so that it is in line with the chassis. In this configuration, it can be driven on public roads.

For mine clearing operations, the complete flail system is rapidly lowered into position at the rear of the vehicle. The system can clear a mine path 3.5 m wide. During mine clearing, the vehicle can be manually operated from the cab using a joystick or through the use of a computerized fully automatic pilot steering system. When being used in the latter configuration, the operator needs only to select a number of key parameters such as depth on the monitor. The depth control of the flail and the armored deflector plate, which is positioned to the immediate rear of the rotating flail, is then fully automatic using sensors. The chains rotate clockwise if mines are buried and counterclockwise if they are on the surface. The flail assembly consists of a rotating axle with 72 chains attached; the end of each of these is fitted with a hammer type head which weighs 0.9 kg. When these chains or heads are damaged, they can be easily and quickly replaced. The axle rotates at up to 400 rpm. Vehicle travel speed depends on the type of terrain. On cross-country terrain, for example, the MACV can travel about 1.4 km/h, while on a firm hard surface it could travel up to 12 km/h.

A robotized MACV will be posted at each of three active-duty USAF RED HORSE Squadrons in a ready-to-deploy status. RED HORSE engineers will be trained in mine/counter-mine clearance procedures and will be on-call to deploy with robotized MACVs anytime, any place. Robotized MACVs are C-130 air transportable and can be delivered to any C-130 capable airfield worldwide. The robotized MACV will give Combatant Commanders a viable option to rapidly clear large numbers of UXO from airfield surfaces anywhere, anytime.

Results: Mine Area Clearance Vehicle (MACV) Explosive Experiments



Figure 1. Hydrema 910 Mine Area Clearance Vehicle

3.0 References

- 3.1 Air Force Research Laboratory Mission/ Project Plan for Trial Number 2005-07, "Mine Area Clearance Vehicle (MACV) Explosive Experiments," June 2005.
- 3.2 "Low Velocity Airdrop of the Modified All-Purpose Remote Transport System (ARTS-II)," HQ U.S. Army Operational Test Command, June 2005 (FOUO).
- 3.3 "ConWep 2.1.0.8," software developed by USAE Engineer Research and Development Center.

4.0 Objectives and Technical Approach

- 4.1. Objective. The objective of this experiment was to demonstrate the survivability of the robotic controls during a detonation. Explosive materials were detonated in close proximity to the flail assembly, and the effects on the robotic controls were measured and analyzed.
- 4.2. Technical Approach. This experiment consisted of four detonations (Figure 2) to represent possible situations during clearance operations. All charges were located close to, but outside the rotating radius of the flail (approximately 3.5 ft horizontal distance from flail centerline). The first detonation consisted of a non-fragmenting explosive charge to measure blast pressures and effect on the flail assembly. The remaining series of charges consisted of fragmenting ordnance items positioned at various locations adjacent to the flail. These charges were:
 1. Non-fragmenting 10-lb C-4 charge
 2. M67 Frag Grenade
 3. BLU-97 CEM (Combined Effects Munition)
 4. M15 Mine

Results: Mine Area Clearance Vehicle (MACV) Explosive Experiments

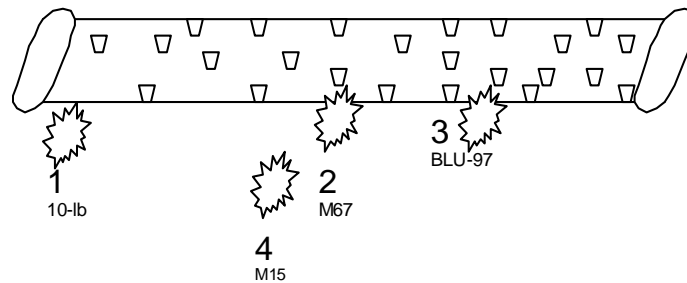


Figure 2. Explosive Placement

4.3. Data Collection. Data collection consisted of high-speed and still photography, accelerometers and pressure gauges. Details on the gauges are shown in Figure 3 and summarized below:

- Accelerometer #1: Range = 200g. Located on left (as you face the flail) wall panel of cab, where the robotic low level controls were located. Orientation was transverse to the vehicle axis (i.e., left to right axis). NOTE: This gauge malfunctioned during the experiments and produced no useful data.
- Accelerometer #2: Range = 200 g. Located on left panel inside cab, near the video controllers. Orientation was along vehicle axis (i.e., front to back axis).
- Accelerometer #3: Range = 200 g. Located on horizontal surface left side, at video controllers. Orientation was vertical.
- Accelerometer #4: Range = 100 g. Located on right side of cab on high level controller tray. Orientation was axial and redundant with Accelerometer #2 (i.e., front to back axis) for Experiments 1 and 2. Orientation was then changed to transverse to the vehicle axis (i.e., left to right axis) for Experiments 3 and 4 to compensate for malfunctioning Accelerometer #1.
- Free Field Pressure Gauge #1: Range = 10 psi. Located on operator's seat inside cab.
- Free Field Pressure Gauge #2: Range = 10 psi. Located on floor behind operator's seat inside cab.
- Free Field Pressure Gauge #3: Range = 25 psi. Located in open test arena 31.5 feet from explosive device (same standoff as the MACV operator's cab).

5.0 Experimental Results

The four MACV experiments were conducted on 8 July 2005 at AFRL's Range 2, Tyndall AFB, FL. For each experiment, the vehicle was stationary with the flail operating at a height that just touched the ground surface. The explosive charges were placed 3.5 feet horizontal distance from the flail centerline, just beyond the radius of the flail hammers. Following the explosive detonation, the flail was stopped and the MACV inspected for damage.

Results: Mine Area Clearance Vehicle (MACV) Explosive Experiments

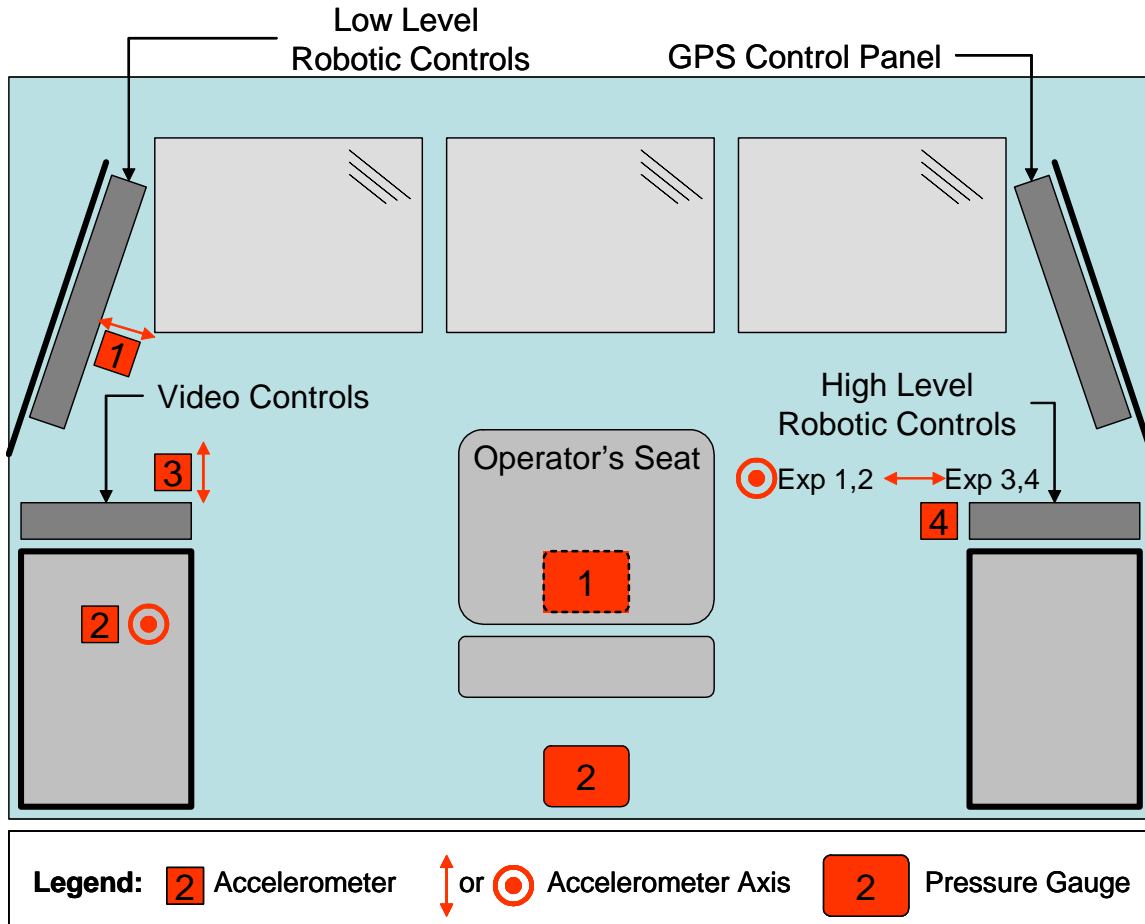


Figure 3. Instrumentation Inside Operator's Cab

- 5.1 Test 1: 10-lb C-4 Charge. A 10-lb block of C-4 military explosive was buried level with the ground and near the right end of the flail assembly (Figures 4 and 5). This non-fragmenting charge would expose the MACV to only shock and pressure loads. The incident pressure loads at the cab standoff (31.5 ft) were predicted by ConWep (Reference 3.3) to be approximately 5.6 psi. Table 1 summarizes the test results. The gauge plots are included in the Appendix. The robotics controls suffered no damage in Test 1.

Results: Mine Area Clearance Vehicle (MACV) Explosive Experiments



Figure 4. Pre-test: 10-lb C-4 Charge



Figure 5. Post-test: 10-lb C-4 Charge

Table 1. Test 1 Results

Gauge	Description	Measurement
Accelerometer #1	Transverse	No Data
Accelerometer #2	Axial	2.1 g @ 18 ms
Accelerometer #3	Vertical	3.0 g @ 18 ms
Accelerometer #4	Axial	2.1 g @ 13 ms
Free Field #1	Inside Cab	0.08 psi @ 31 ms
Free Field #2	Inside Cab	0.11 psi @ 26 ms
Free Field #3	Arena	4.7 psi @ 19 ms
ConWep Prediction	Arena Prediction	5.6 psi @ 16 ms
Crater	Diameter/Depth	6.5 ft diam / 14 in deep

Results: Mine Area Clearance Vehicle (MACV) Explosive Experiments

- 5.2 Test 2: M67 Frag Grenade. The M67 grenade is a spherical steel grenade containing 0.13 lbs Comp B explosive. The grenade was buried level with the ground and near the center of the flail assembly (Figures 6 and 7). The incident pressure loads at the cab standoff (31.5 ft) were predicted by ConWep (Reference 3.3) to be approximately 0.7 psi. Table 2 summarizes the test results. The gauge plots are included in the Appendix. The robotics controls suffered no damage in Test 2.

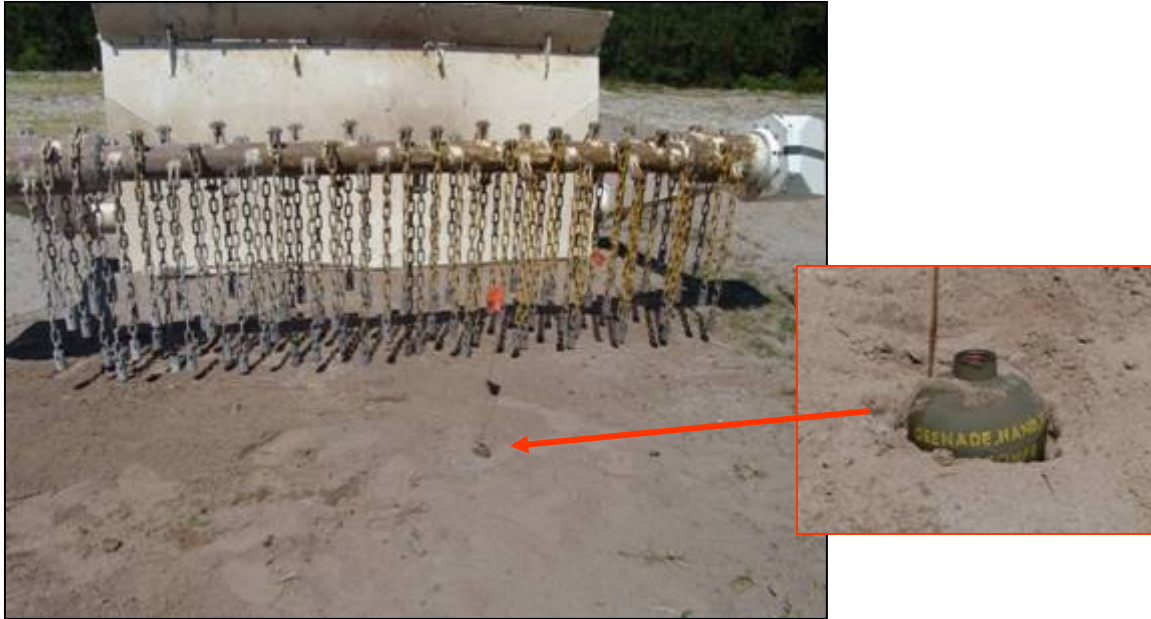


Figure 6. Pre-test: M67 Grenade



Figure 7. Post-test: M67 Grenade

Results: Mine Area Clearance Vehicle (MACV) Explosive Experiments

Table 2. Test 2 Results

Gauge	Description	Measurement
Accelerometer #1	Transverse	No Data
Accelerometer #2	Axial	1.4 g @ 26 ms
Accelerometer #3	Vertical	1.7 g @ 17 ms
Accelerometer #4	Axial	0.5 g @ 19 ms
Free Field #1	Inside Cab	0.02 psi @ 29 ms
Free Field #2	Inside Cab	0.03 psi @ 31 ms
Free Field #3	Arena	0.7 psi @ 25 ms
ConWep Prediction	Arena Prediction	0.7 psi @ 25 ms
Crater	Diameter/Depth	28 in diam / 8 in deep

5.3 Test 3: BLU-97 CEM. The BLU-97 Combined Effects Munition (CEM) is a soda-can-sized bomblet submunition containing 0.64 lbs explosive that is dispensed in large numbers (approximately 150-200 bomblets per weapon) to attack “soft” area targets. The bomblet was placed on the ground and near the center of the flail assembly (Figures 8 and 9). The incident pressure loads at the cab standoff (31.5 ft) were predicted by ConWep (Reference 3.3) to be approximately 1.3 psi. Table 3 summarizes the test results. The gauge plots are included in the Appendix. The robotics controls suffered no damage in Test 3.



Figure 8. Pre-test: BLU-97 CEM

Results: Mine Area Clearance Vehicle (MACV) Explosive Experiments



Figure 9. Post-test: BLU-97 CEM

Table 3. Test 3 Results

Gauge	Description	Measurement
Accelerometer #1	Transverse	No Data
Accelerometer #2	Axial	0.6 g @ 24 ms
Accelerometer #3	Vertical	0.6 g @ 17 ms
Accelerometer #4	Transverse	0.9 g @ 17 ms
Free Field #1	Inside Cab	0.02 psi @ 29 ms
Free Field #2	Inside Cab	0.03 psi @ 31 ms
Free Field #3	Arena	0.9 psi @ 23 ms
ConWep Prediction	Arena Prediction	1.3 psi @ 23 ms
Crater	Diameter/Depth	39 in diam / 15 in deep

- 5.4 Test 4: M15 Mine. The M15 Mine is an antitank mine that is contained in a round sheet-steel casing containing approximately 22.75 lbs Comp B explosive. The mine was buried level with the ground surface and near the center of the flail assembly (Figures 10 and 11). The incident pressure loads at the cab standoff (31.5 ft) were predicted by ConWep (Reference 3.3) to be approximately 9.1 psi. Table 4 summarizes the test results. The gauge plots are included in the Appendix. The robotics controls suffered no damage in Test 4.

Results: Mine Area Clearance Vehicle (MACV) Explosive Experiments



Figure 10. Pre-test: M15 Mine



Figure 11. Post-test: M15 Mine

Results: Mine Area Clearance Vehicle (MACV) Explosive Experiments

Table 4. Test 4 Results

Gauge	Description	Measurement
Accelerometer #1	Transverse	No Data
Accelerometer #2	Axial	2.7 g @ 17 ms
Accelerometer #3	Vertical	8.7 g @ 17 ms
Accelerometer #4	Transverse	6.3 g @ 18 ms
Free Field #1	Inside Cab	0.11 psi @ 29 ms
Free Field #2	Inside Cab	0.17 psi @ 26 ms
Free Field #3	Arena	5.5 psi @ 19 ms
ConWep Prediction	Arena Prediction	9.1 psi @ 14 ms
Crater	Diameter/Depth	9 ft diam / 28 in deep

6.0 Discussion

The Mine Area Clearance Vehicle was exposed to a range of munitions, including blast and fragment-producing weapons. The only damage noted from any of the four experiments was a vent cover knocked loose in the operator's cab, and a few fragment nicks on the deflector shield next to the flail mechanism. The vehicle remained fully operational, including the robotic controls, throughout the test series.

Figure 12 summarizes the blast pressures measured in the four experiments. Except for the M67 Grenade (Test 2), the measured free field (incident) pressures tended to be only 60 to 73% of predicted. Nevertheless, in all cases the increase in cab pressure was minimal, well below any pressure increase that would cause even temporary hearing problems for people or damage to equipment.

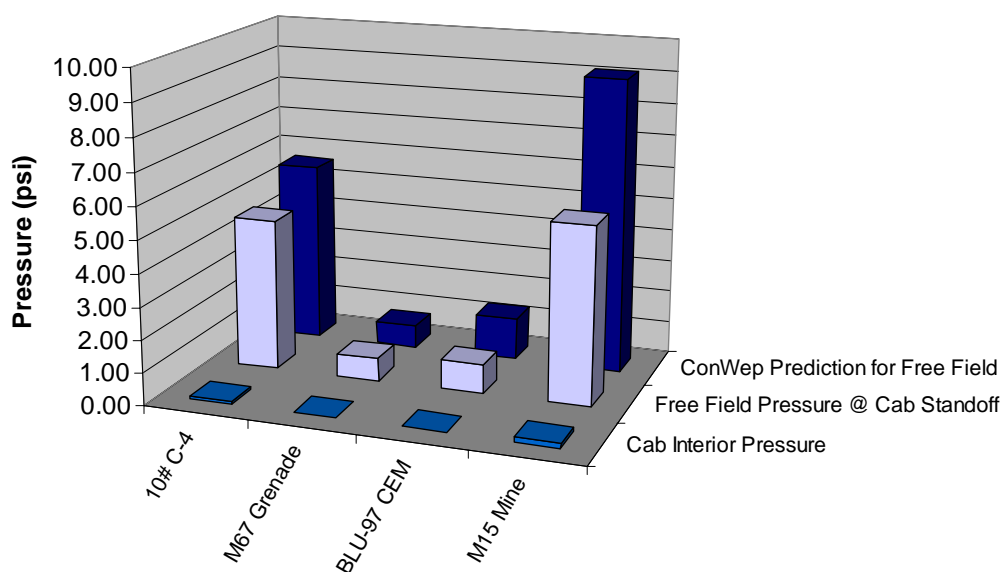


Figure 12. MACV Pressure Measurements

Results: Mine Area Clearance Vehicle (MACV) Explosive Experiments

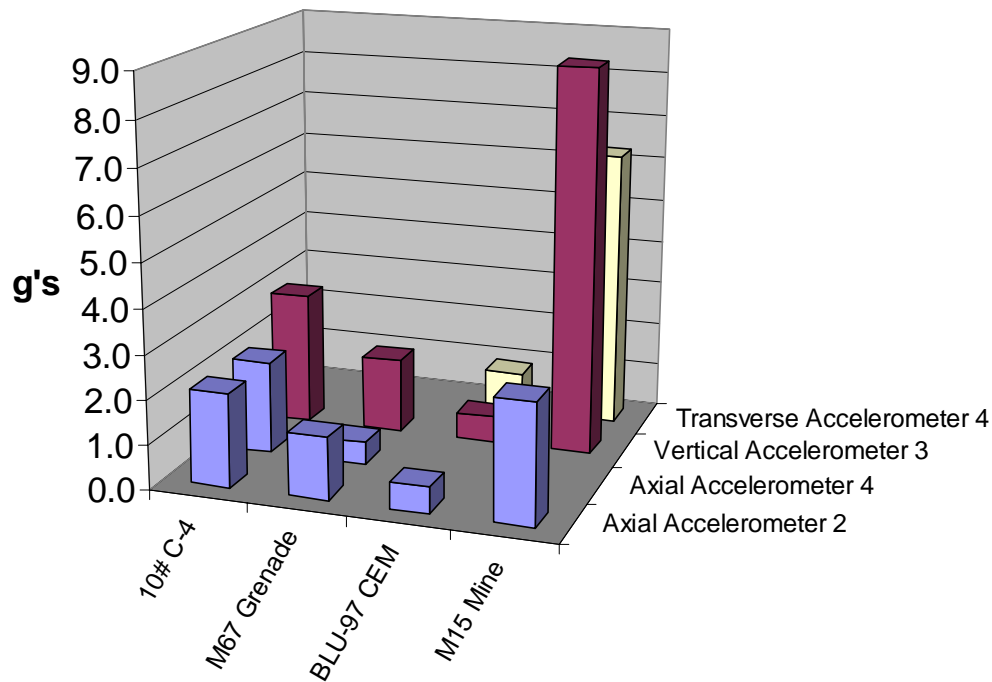


Figure 13. MACV Cab Accelerations

Figure 13 summarizes the accelerometer results from the four experiments. The magnitude of acceleration was taken as the maximum acceleration (either positive or negative) prior to the first “significant or obvious” spring back in the record. The pure accuracy of this data is always suspect due to the difficulty in interpreting accelerometer data (see Appendix). However, the general magnitudes are consistent with the blast pressures, and some reasonable conclusions can be drawn. The vertical accelerations usually had the largest magnitudes, and were close to the magnitude of the axial (front to back axis) acceleration, except for the M15 Mine experiment. Even the worst case, 8.7 g’s vertical acceleration for the M15 Mine, was well below the 19.5 g’s that similar robotic controls experienced in the airdrop testing of the All-Purpose Remote Transport System (ARTS) (Reference 2.2).





7.0 Conclusions

The robotically-controlled Mine Area Clearance Vehicle (MACV) was exposed to a range of munitions detonated adjacent to the mine-clearing flail, ranging from antipersonnel weapons to antitank weapons. None of the weapons had an appreciable effect on the MACV or on the robotic controls contained in the operator’s cab. The vehicle cab was exposed to approximately 5.5 psi incident pressures on the exterior, but the interior pressure increased less than 0.2 psi. The magnitude of shock experienced by the cab and the robotic controls was 8.7 g’s or less, well within the proven capacity of the control systems of 19.5 g’s. Overall, the MACV did a good job protecting the cab and the robotic controls in the experiment series.




Results: Mine Area Clearance Vehicle (MACV) Explosive Experiments

Appendix: Data Graphs





MACV – Experiment 1

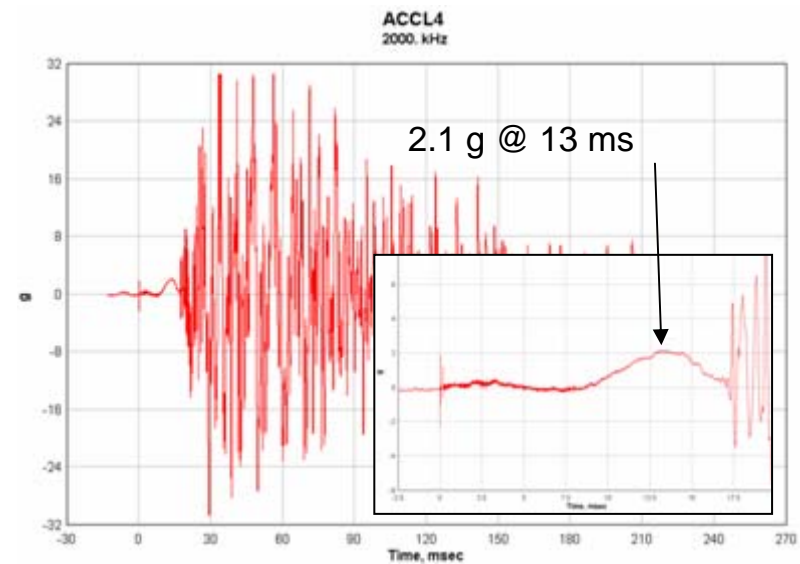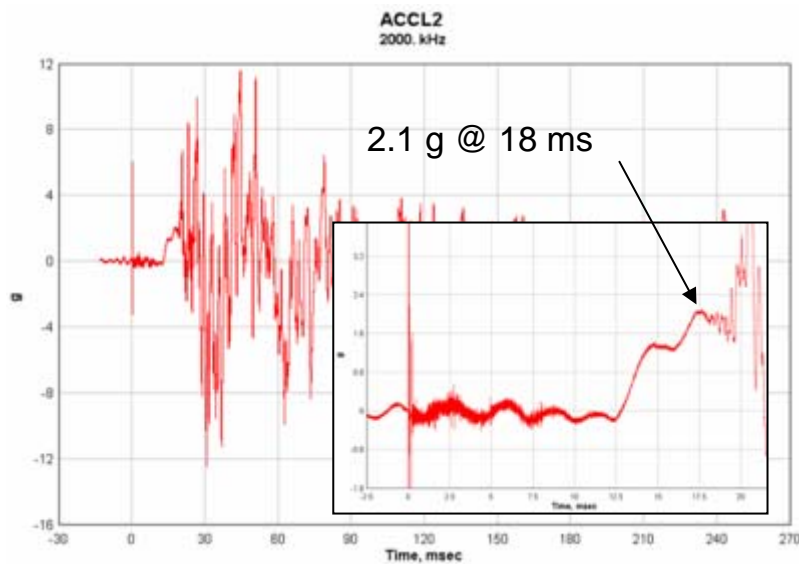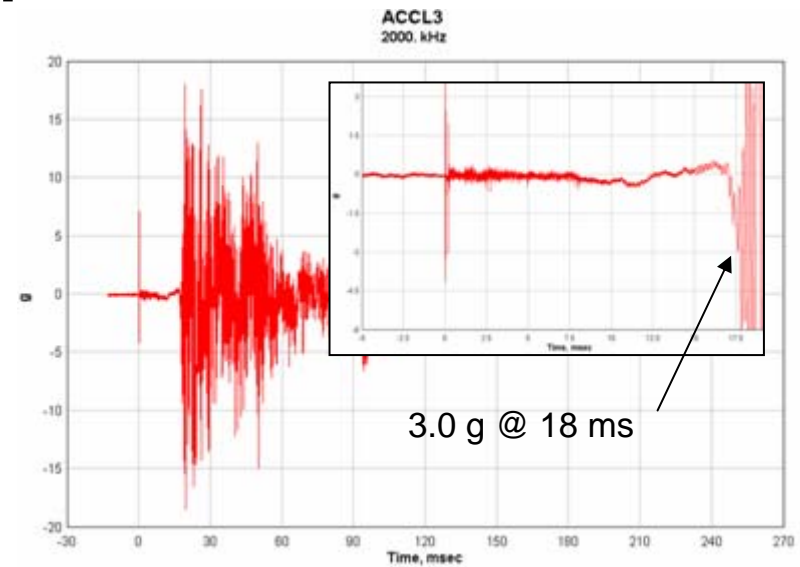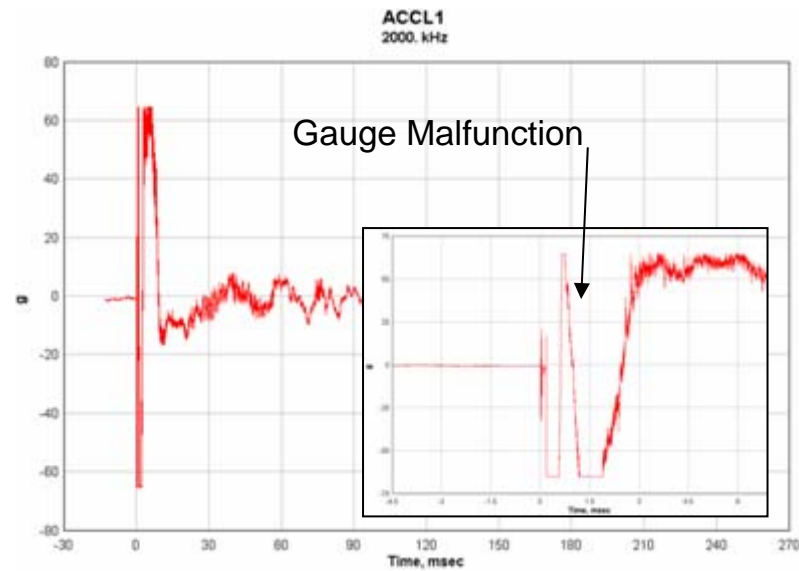




MACV – Experiment 1

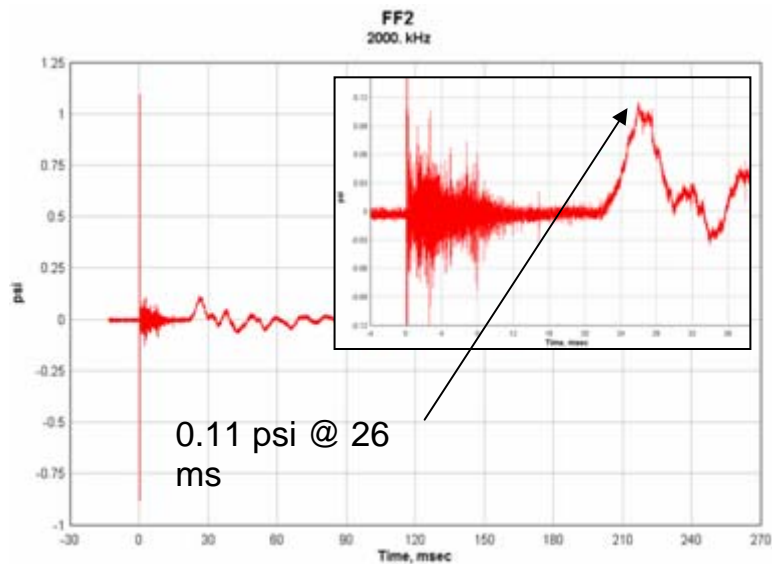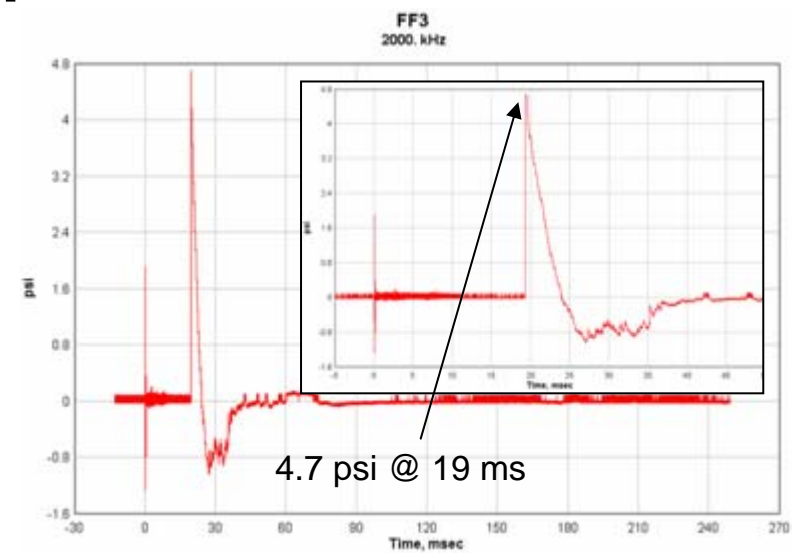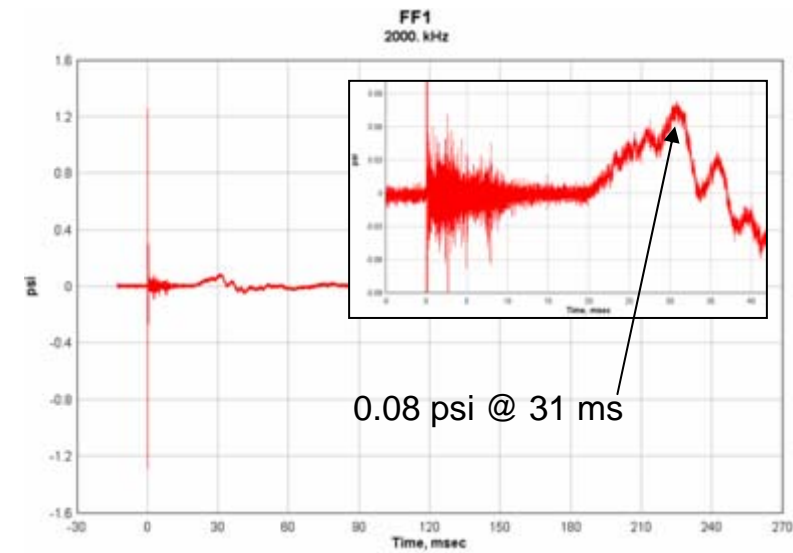





MACV – Experiment 2

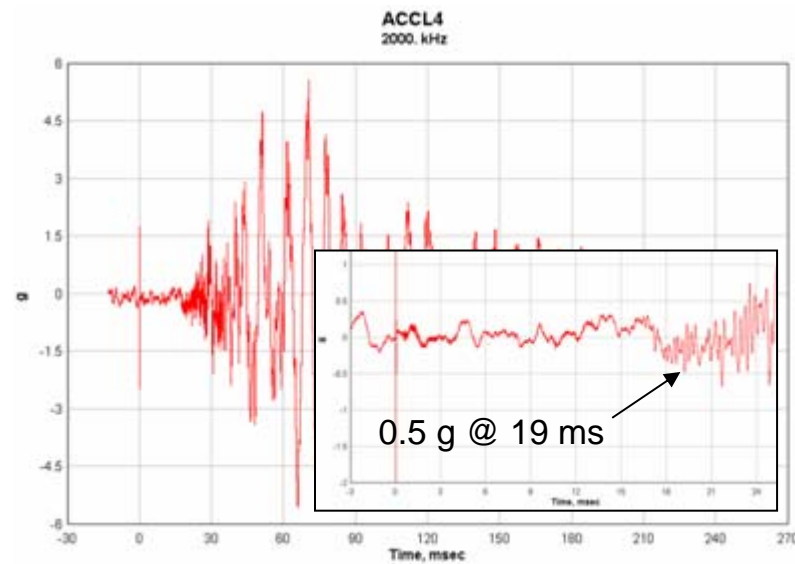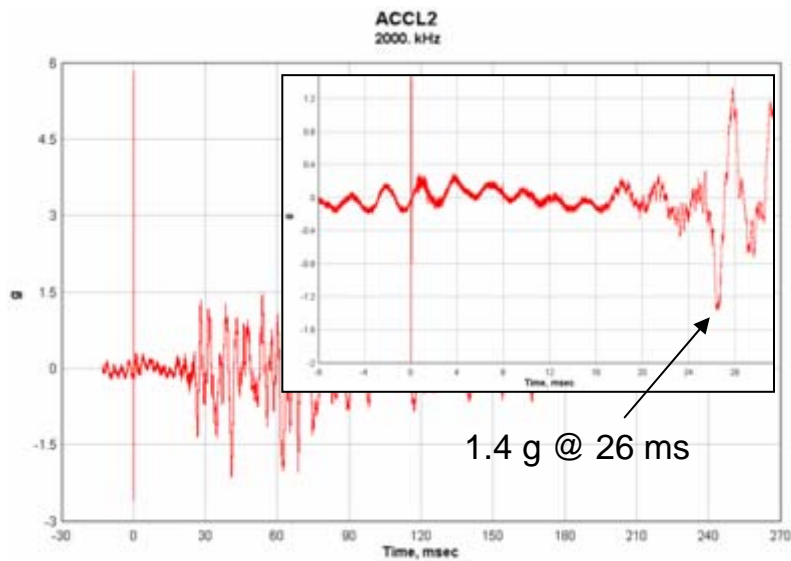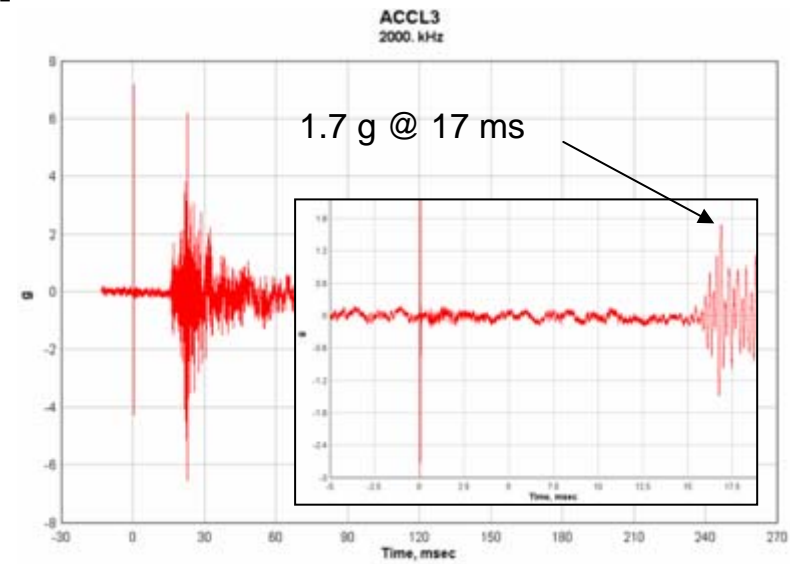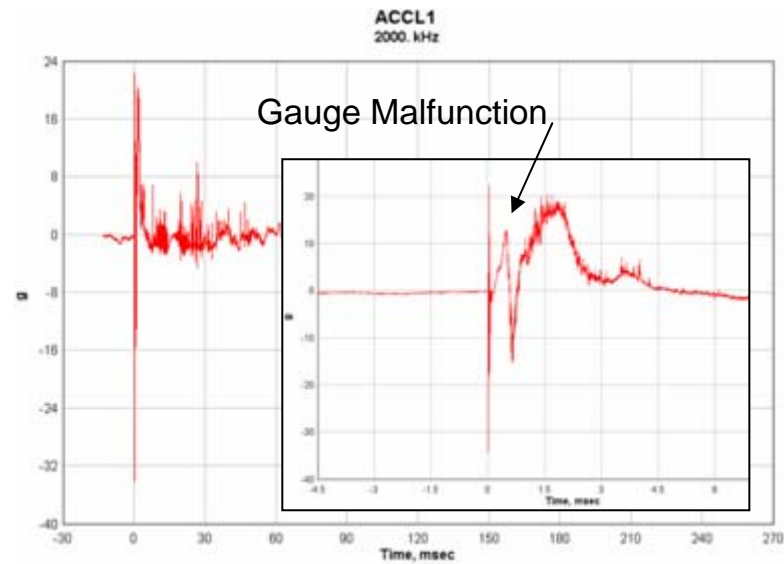




MACV – Experiment 2

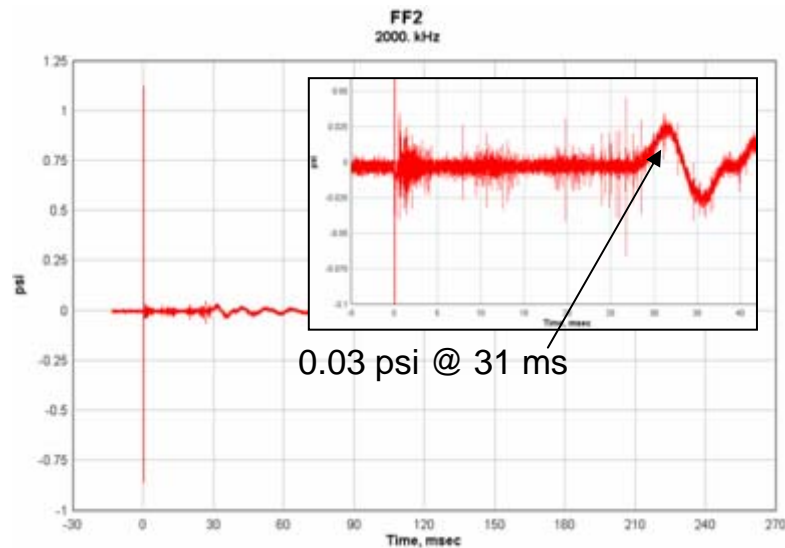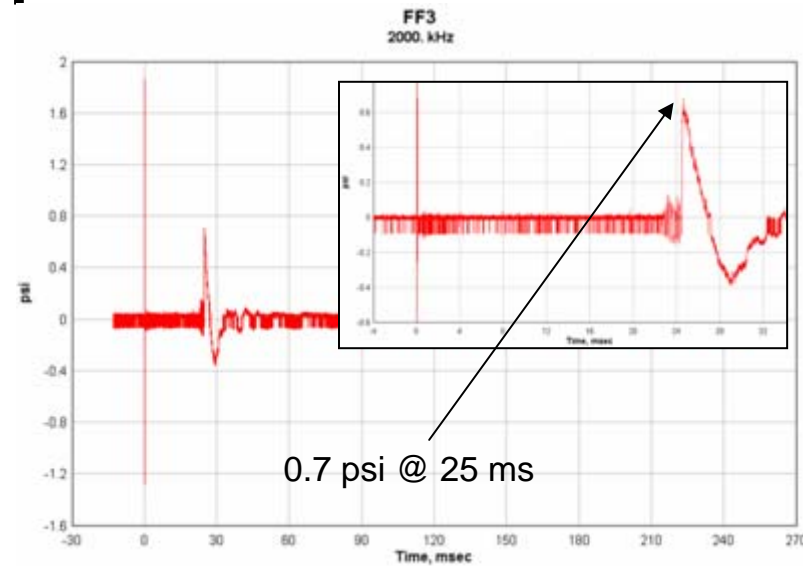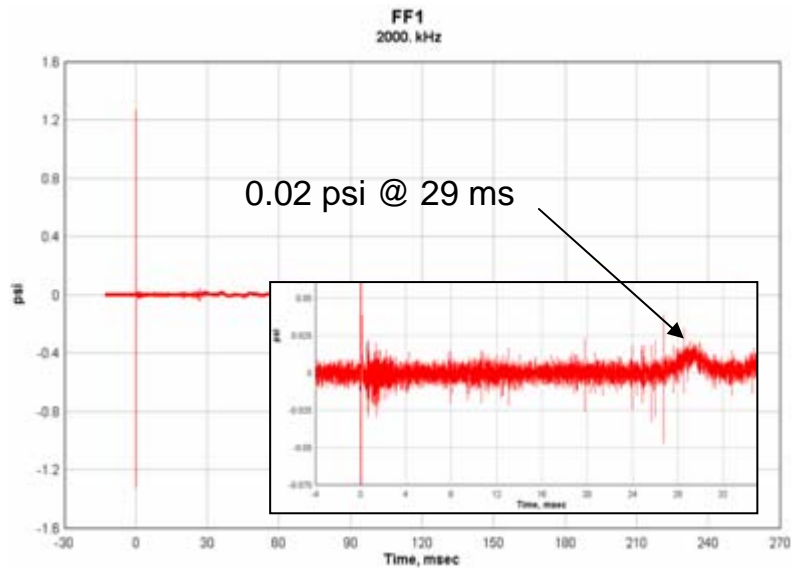





MACV – Experiment 3

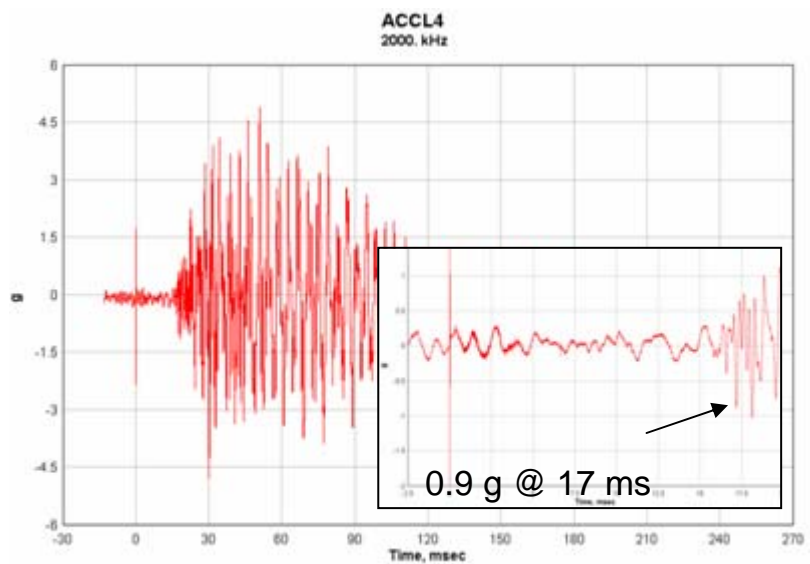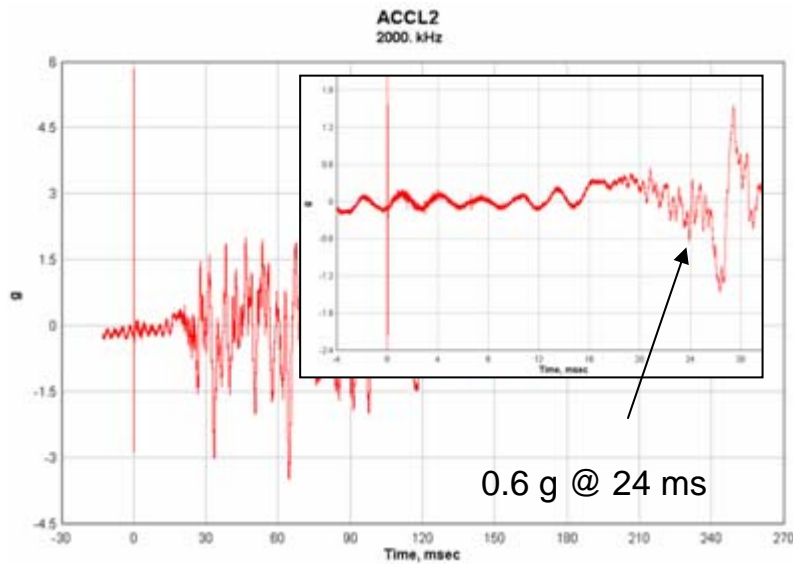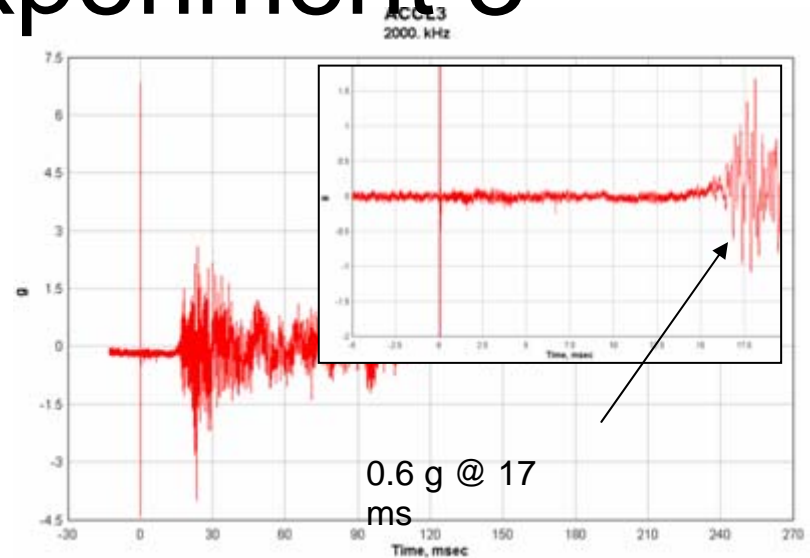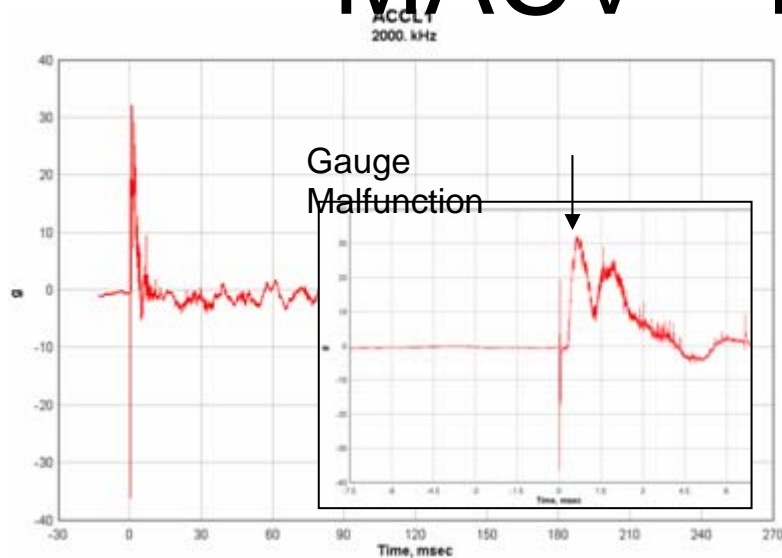

MACV – Experiment 3

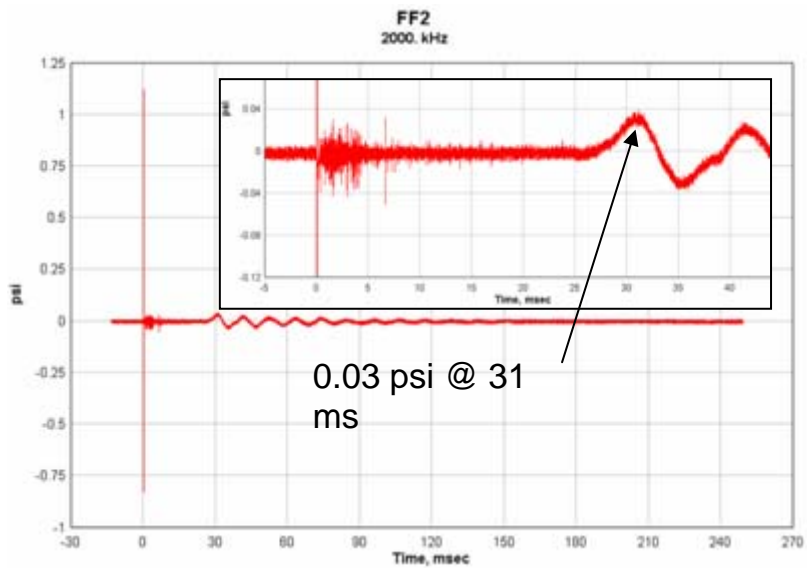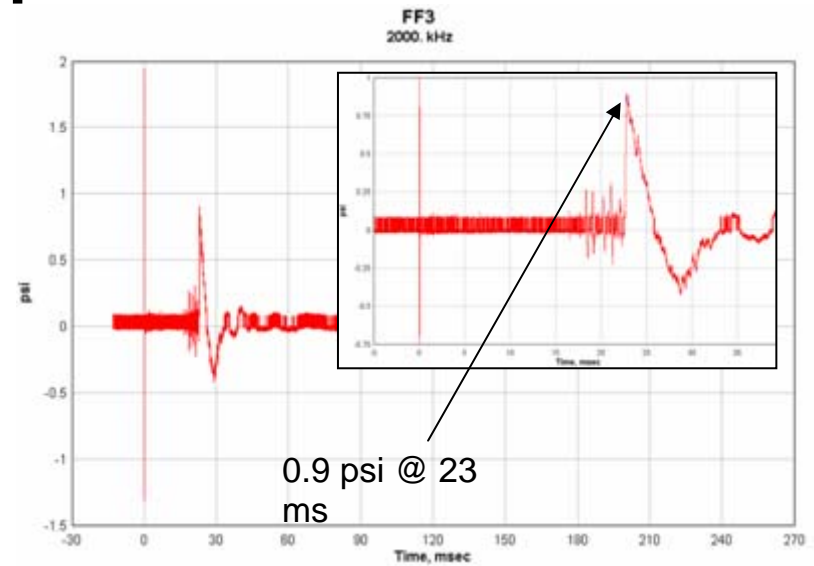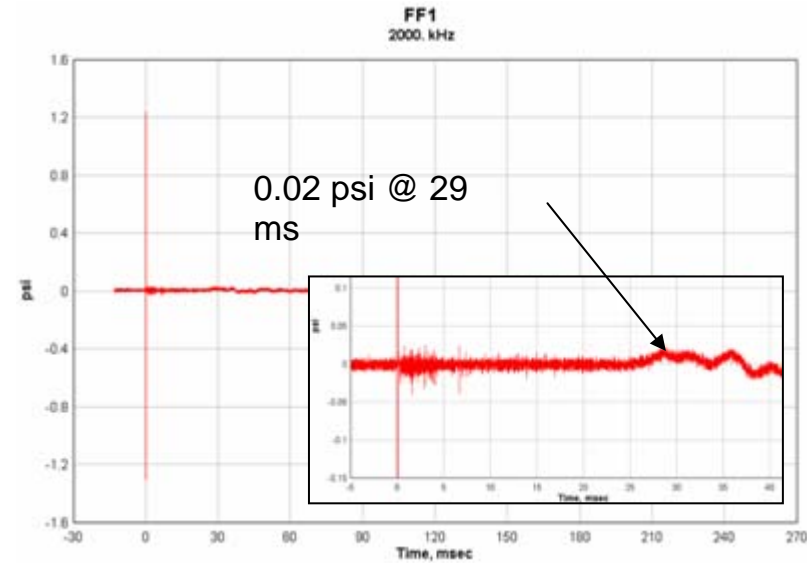

MACV – Experiment 4

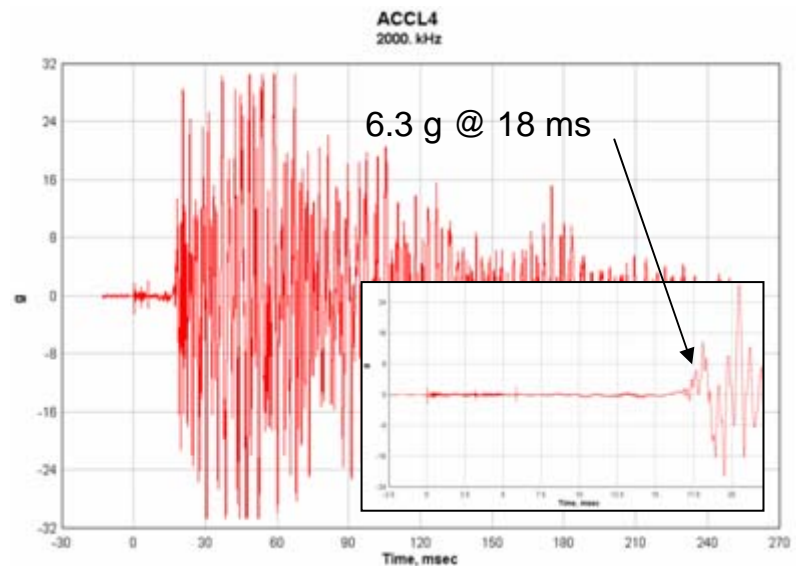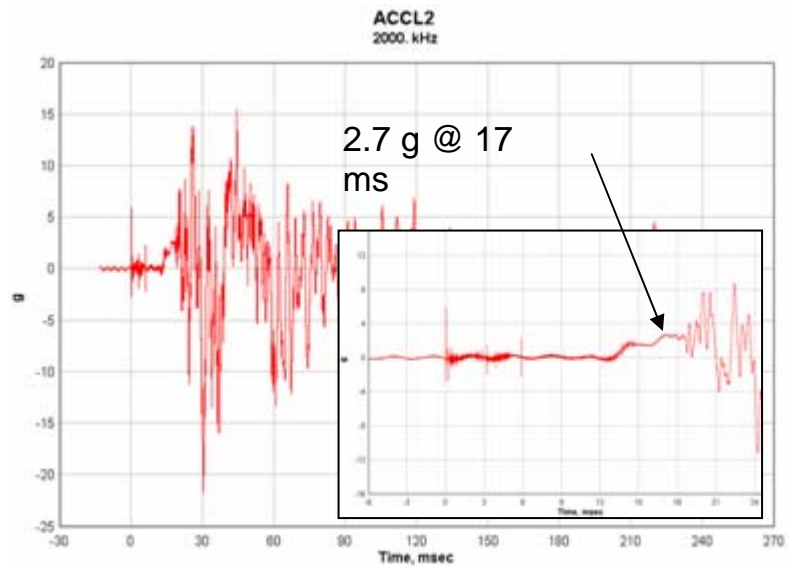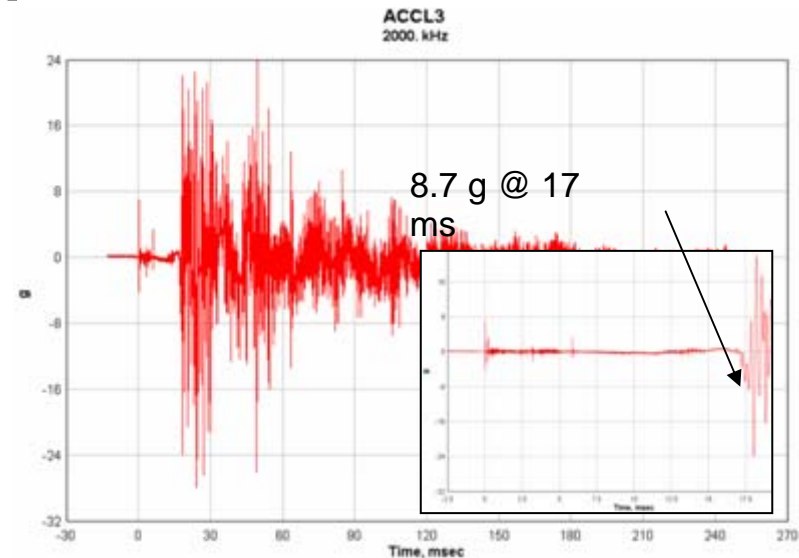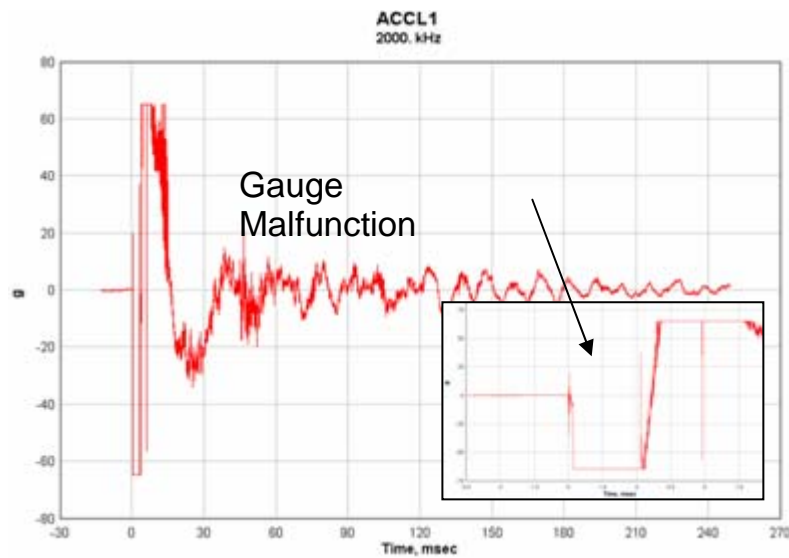

MACV – Experiment 4

